


Specification: Flexicraft Series DWV-PLUS neoprene vertical expansion joint with stainless steel no hub clamps

Function: Used to reduce the expansion and contraction movements in all types of vertical leaders, pipes, stacks and vents or soil lines in order to prevent damage to this material and to the building. 1 -3/4" compression, 3/4" extension, 1/2" lateral offset, 15° angular movement.

Installation: Tighten bolts to 60 in/lbs min/max torque. 5/16 "driver required to tighten bolts.

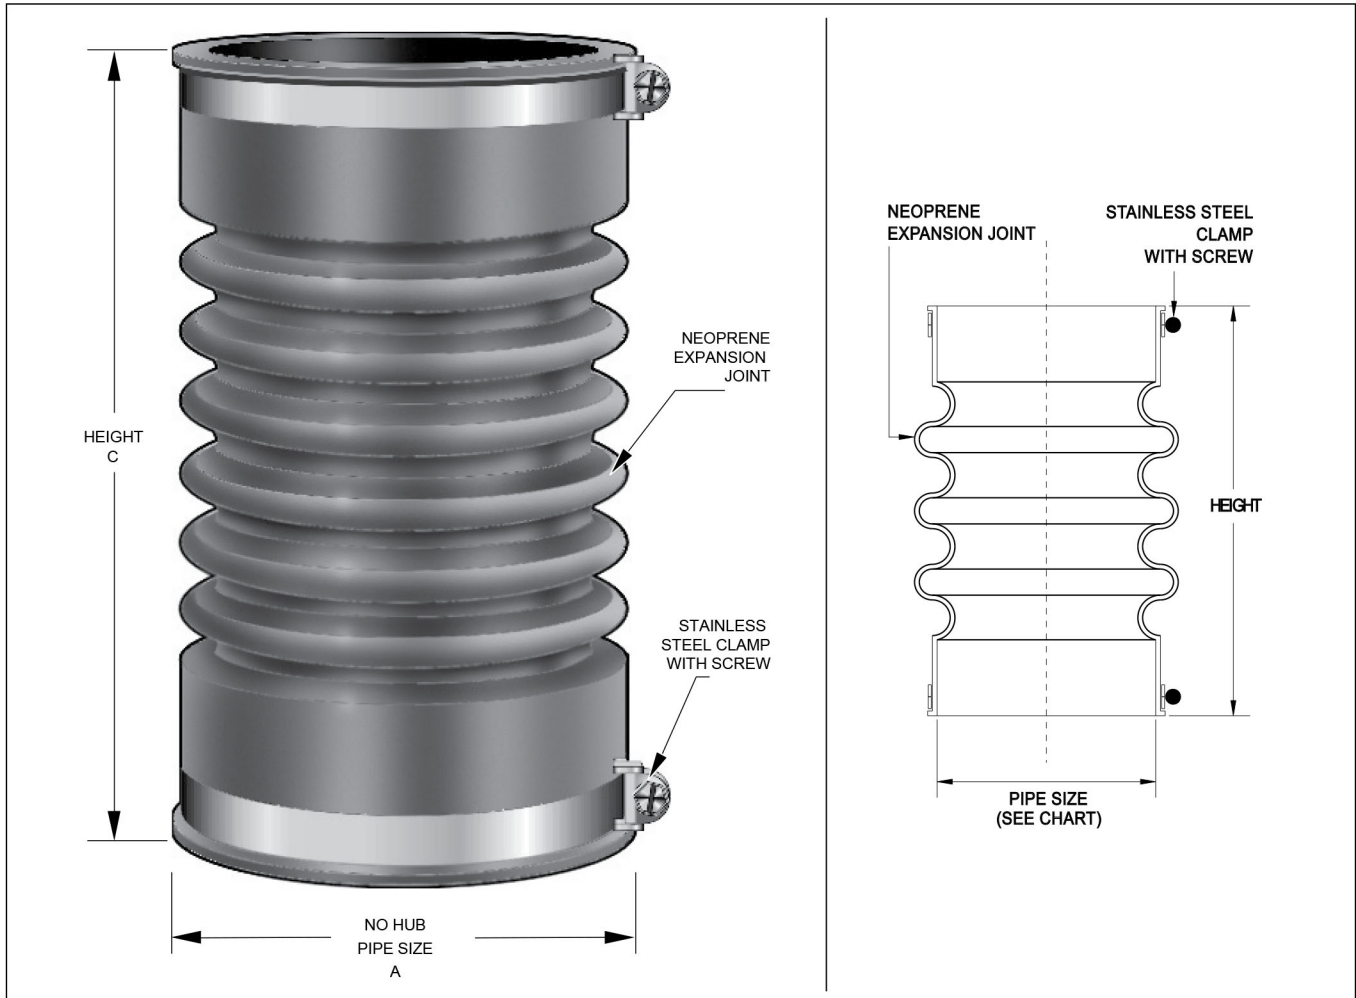

**Note: Effective temperature range is from 0°F to 190°F
Maximum Pressure 4.3 psi**

MODEL NUMBER	A PIPE SIZE	C HEIGHT
● DWVPLUS0200	2" x 2"	7 1/8" (178)
● DWVPLUS0300	3" x 3"	8 1/8" (203)
● DWVPLUS0400	4" x 4"	8 5/8" (216)
● DWVPLUS0600	6" x 6"	8 5/8" (216)
● DWVPLUS0800	8" x 8"	11" (279)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____