



FLEXICRAFT

BELLOWS CONNECTORS WITH TIE RODS



The **Bellow Connector**, which is kept stocked to 12" for fast delivery, is designed to meet a broad set of needs. It has a 2-ply construction and tie rods that allow it to work well, and economically, in many situations.

150 F Maximum Working Pressure225 psi
 212 F Maximum Working Pressure190 psi
 480 F Maximum Working Pressure110 psi

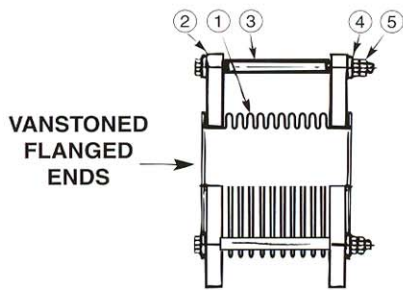

SEE BELOW FOR
NUMBER OF RODS

LIST OF MATERIALS		
ITEM	PART	Material
1	Bellows (2 ply)	T304 S.S.
2	ANSI 150# Flange	Carbon Steel
3	Tie Rods	AISI-1020
4	Grommett	Neoprene
5	Nuts	ANSI-1020

SIZE	OAL (in)	COMPRESSION (in)	EXTENSION (in)	LATERAL (in)	NO. TIE RODS	WEIGHT (lbs.)
2"	6	0.9	0.2	0.66	3	12
2-1/2"	6	0.9	0.2	0.53	3	16
3"	6	0.9	0.2	0.45	3	18
4"	6	1	0.2	0.39	3	28
5"	6	1	0.2	0.31	3	34
6"	6	1	0.2	0.26	3	43
8"	6	1	0.2	0.22	3	63
10"	8	1.4	0.2	0.33	3	93
12"	8	1.4	0.2	0.26	3	120
14"	8	1.4	0.2	0.33	3	145