


## BRAIDED FLEXIBLE CONNECTOR - THREADED

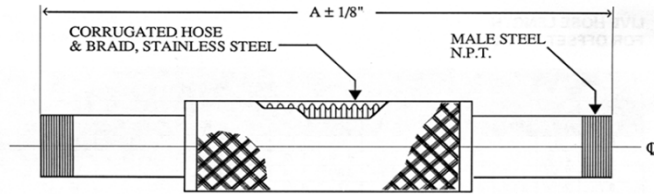


Materials	
Fittings	MNPT Thread, Carbon Steel
Inner Hose	321 Stainless Steel
Braid	304 Stainless Steel

For Temperatures Above 70° F						
Temp °F	70	200	300	400	500	600
Factor	1.00	0.92	0.86	0.82	0.77	0.73

The twostocked lengths: short, medium, and long, as shown below

Dimensions			Pressure	Lateral Movement	Product No.
Size	Model	Length A			
in	S/L	in	psi	in	
3/8	S	6	1650	1/8	TTS0038
1/2	S	6 1/2	1375	1/8	TTS0050
1/2	L	10	1375	1/4	TTL0050
3/4	S	7	750	1/8	TTS0075
3/4	L	10	750	1/4	TTL0075
1	S	8	605	1/8	TTS0100
1	L	10	605	1/4	TTL0100
1 1/4	S	8 1/2	570	1/8	TTS0125
1 1/4	L	10	570	1/4	TTL0125
1 1/2	S	9	525	1/8	TTS0150
1 1/2	L	12	525	1/4	TTL0150
2	S	10 1/2	455	1/8	TTS0200
2	L	14	455	1/4	TTL0200
2 1/2	L	16	345	1/4	TTL0250

 <p><b>"Flexible Piping Solutions"</b></p> <p><b>PRINT CERTIFICATION:</b>                  Certified Correct As Of: _____                   By: _____</p>	Proposal/Inquiry/Order No.: _____	<b>NOTES:</b>   Flexicraft connectors combine excellent performance and economy. They are usually stocked.
	Customer Name: _____	
	Project Name: _____	
	Contractor: _____	