


PN2 PVC CLEAR SUCTION & DISCHARGE HOSE

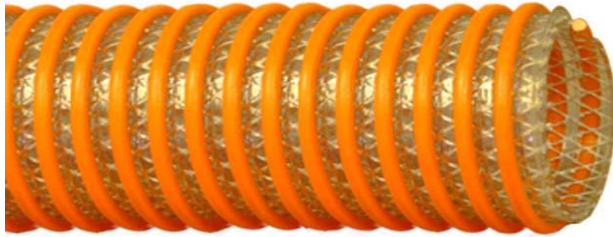

PSN is lightweight, high quality PVC hose specially designed for suction or transfer applications where visual flow is preferred. It is constructed from a very flexible corrugated, clear PVC with a smooth bore, and an external rigid orange or white PVC helix that allows for easy dragging. 5F to 150F.

QTY	INNER DIA	OAL	FITTINGS	OUTER DIA	PRESSURE*	BEND RADIUS	WEIGHT
	(in)	(in)		(in)	(psi)	(in)	(lbs/ft)
	1 1/2			2	100	2	0.47
	2			2 9/16	100	4	0.70
	3			3 5/8	100	6.3	1.13
	4			4 3/4	75	7.1	1.74
	6			7 3/16	70	10.2	3.88
	8			9 1/4	60	15.7	5.54
	10			11 5/8	40	24.8	8.68

NOTES: *THE HOSE IS RATED FOR -4 TO 150 DEG F. HIGHER TEMPERATURES THAN 70F AFFECT PRES. RATING.

CUSTOMER _____ PROJECT _____ ENGINEER _____ CONTRACTOR _____ CERTIFICATION _____	 "Flexible Piping Solutions"				
	<table border="1" style="width: 100%;"> <tr> <td style="width: 50%;">MODEL:</td> <td style="width: 50%; text-align: center;">PN2</td> </tr> <tr> <td>DRAWN BY: PDB 8/04</td> <td style="text-align: center;">PVC CLEAR SUCTION & DISCHARGE HOSE</td> </tr> </table>	MODEL:	PN2	DRAWN BY: PDB 8/04	PVC CLEAR SUCTION & DISCHARGE HOSE
MODEL:	PN2				
DRAWN BY: PDB 8/04	PVC CLEAR SUCTION & DISCHARGE HOSE				