


TEFLEX 2C EXPANSION JOINT

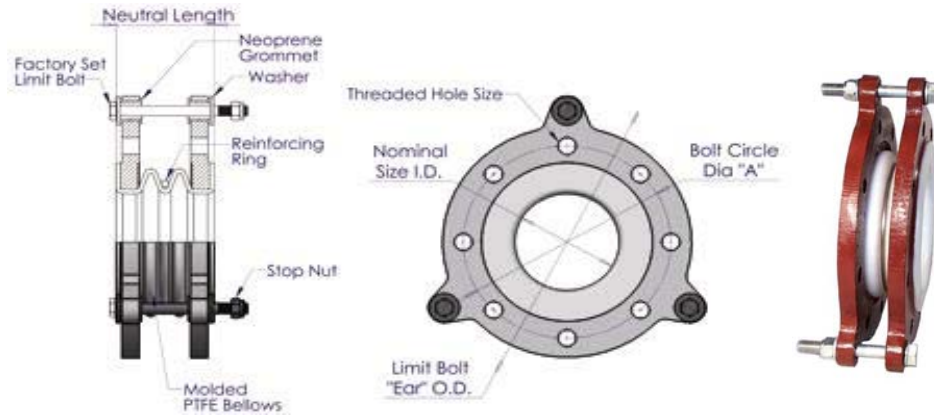

The Teflex expansion joints are composed of unreinforced PTFE and come standard with iron 150# drill flanges. Stainless flanges are available as an option. They are available in 2, 3, or 5 convolutions of varying movements. The 2-convolution joint shown here is sometimes referred to as a "coupling".

Dimensions		Pressure/Temp				Movement		Weight	Product No.
Size	Length A	70°F	200°F	300°F	400°F	Axial Comp	Lateral		
in	in	psi	psi	psi	psi	in	in	lbs	
2	1.5625	180	135	95	65	0.2500	0.125	7	TFLX2C0200
2.5	2.25	180	130	95	65	0.3125	0.125	10	TFLX2C0250
3	2.25	180	125	90	60	0.375	0.1875	12	TFLX2C0300
4	2.625	180	125	85	60	0.5	0.25	18	TFLX2C0400
5	3.25	180	120	85	60	0.5	0.25	24	TFLX2C0500
6	2.75	180	115	85	55	0.5	0.25	29	TFLX2C0600
8	4	160	110	80	55	0.5	0.25	47	TFLX2C0800
10	5.25	160	110	80	55	0.5	0.25	64	TFLX2C1000
12	6	70	105	75	50	0.5	0.25	72	TFLX2C1200

<p>"Flexible Piping Solutions"</p>	Proposal/Inquiry/Order No.: _____	NOTES:
	Customer Name: _____	
Project Name: _____		
Contractor: _____		
<p>PRINT CERTIFICATION:</p> Certified Correct As Of: _____	The above expansion joints and related hardware, meet or exceed the physical, mechanical or material specifications of the Rubber Expansion Joint Div., Fluid Sealing Association. For additional information, see the Association, "Technical Handbook, Fifth Edition", Chapter II, Paragraph A.1. and Tables II, III, IV.	
By: _____		