


ML EXPANSION LOOP


CSA AGA

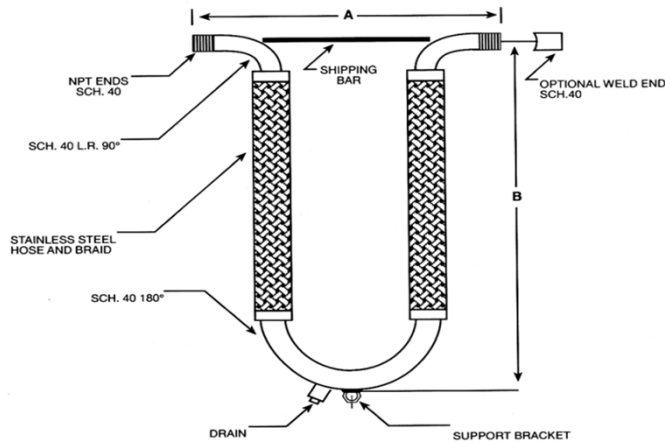

Materials	
Elbow & Fittings	Carbon Steel
Inner Corrugated Hose	321 Stainless Steel
Braid	304 Stainless Steel

ML Loops 2" and larger installed in any orientation other than hanging down must have the 180° return supported (see installation instructions).

Dimensions				Pressure psi	Movement in	Product No.
Size in	A in	B in	Ends W/T			
0.5	15	18	Weld	150	4	LOOPAGAW4050
0.5	15	18	Thread	150	4	LOOPAGAT4050
0.75	15.25	20	Weld	150	4	LOOPAGAW4075
0.75	15.25	20	Thread	150	4	LOOPAGAT4075
1	16	22	Weld	150	4	LOOPAGAW4100
1	16	22	Thread	150	4	LOOPAGAT4100
1.25	16.75	22	Weld	150	4	LOOPAGAW4125
1.25	16.75	22	Thread	150	4	LOOPAGAT4125
1.5	17.5	23	Weld	150	4	LOOPAGAW4150
1.5	17.5	23	Thread	150	4	LOOPAGAT4150
2	14	25	Weld	150	4	LOOPAGAW4200
2	20	25	Thread	150	4	LOOPAGAT4200
2.5	15.5	26	Weld	150	4	LOOPAGAW4250
2.5	21.5	26	Thread	150	4	LOOPAGAT4250
3	18	29	Weld	150	4	LOOPAGAW4300
3	26	29	Thread	150	4	LOOPAGAT4300
4	24	37	Weld	150	4	LOOPAGAW4400
4	32	37	Thread	150	4	LOOPAGAT4400

 <p>"Flexible Piping Solutions"</p> <p>PRINT CERTIFICATION:</p> <p>Certified Correct As Of: _____</p> <p>By: _____</p>	Proposal/Inquiry/Order No.: _____	NOTES: If the ML Loops are oriented in a horizontal plane, a hanger should be used for support of the return elbow.
	Customer Name: _____	
	Project Name: _____	
	Contractor: _____	