


**Specification:** Flexicraft Series DWV-PLUS neoprene vertical expansion joint with stainless steel no hub clamps

**Function:** Used to reduce the expansion and contraction movements in all types of vertical leaders, pipes, stacks and vents or soil lines in order to prevent damage to this material and to the building. 1 -3/4" compression, 3/4" extension, 1/2" lateral offset, 15° angular movement. Connects cast iron or plastic to cast iron or plastic pipe - 2", 3" & 4" sizes only. 6" & 8" models work with cast iron pipe only.

**Installation:** Tighten bolts to 60 in/lbs min/max torque. 5/16 "driver required to tighten bolts.

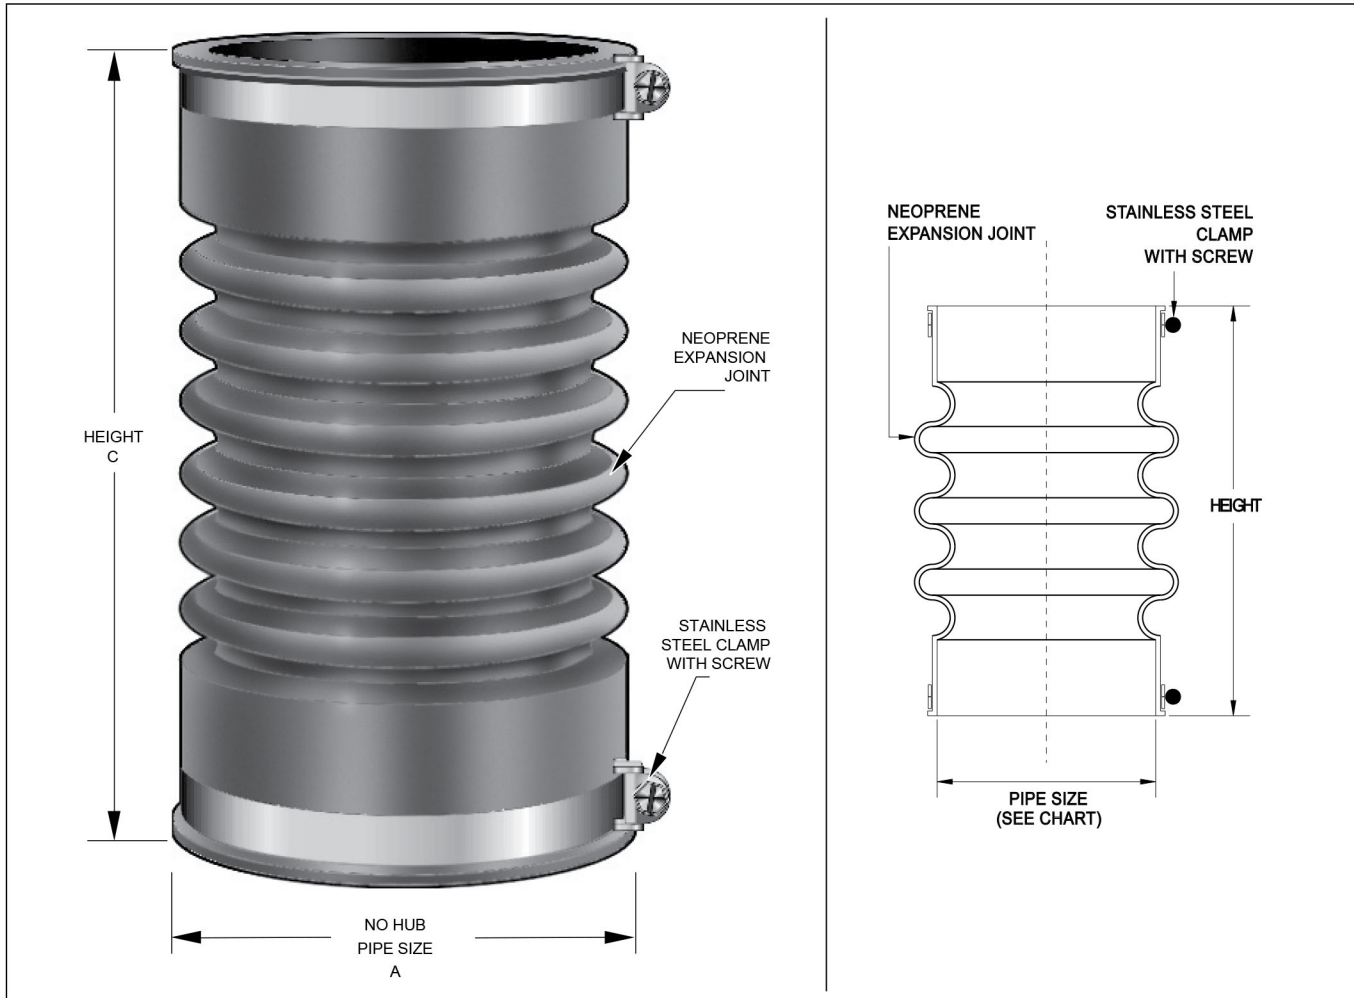

**Note: Effective temperature range is from 0°F to 190°F  
Maximum Pressure 4.3 psi**

MODEL NUMBER	A PIPE SIZE	C HEIGHT
● DWVPLUS0200	2" x 2"	7 1/8" (178)
● DWVPLUS0300	3" x 3"	8 1/8" (203)
● DWVPLUS0400	4" x 4"	8 5/8" (216)
● DWVPLUS0600	6" x 6"	8 5/8" (216)
● DWVPLUS0800	8" x 8"	11" (279)

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_