



MODEL P & CP EXPANSION JOINTS

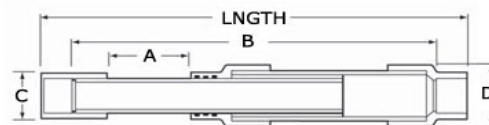

1/2", 3/4" & 1" Configuration

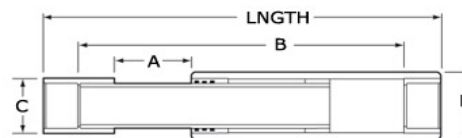

1-1/4" & Up Configuration

PVC O-Ring MTL EPDM
 CPVC O-Ring MTL FKM
 PVC Temperature 140°
 CPVC Temperature 180°

Dimensions						O-Ring Materials	
Size	Movement	Length (Neutral)	B	C	D		
in	in	in	in	in	in	PVC	CPVC
0.5	6	13 9/16	12	1.72	1.28	EPDM	FKM
0.5	12	15	14	1.72	1.28	EPDM	FKM
0.75	6	15 1/2	13	2.06	1.50	EPDM	FKM
0.75	12	16-1/16	15	2.06	1.50	EPDM	FKM
1	6	16 1/4	14	2.34	1.72	EPDM	FKM
1	12	17 7/16	17	2.34	1.72	EPDM	FKM
1.25	6	19 1/4	13	2.38	2.22	EPDM	FKM
1.25	12	18 5/8	16	2.38	2.22	EPDM	FKM
1.5	6	19 15/16	13	2.88	2.34	EPDM	FKM
1.5	12	22 3/4	16	2.88	2.34	EPDM	FKM
2	6	27 1/2	14	3.5	2.88	EPDM	FKM
2	12	31 7/8	17	3.5	2.88	EPDM	FKM
2.5	6	37	15	4.5	4.19	EPDM	FKM
2.5	12	43 3/4	18	4.5	4.19	EPDM	FKM
3	6	22 9/16	15	4.5	4.19	EPDM	FKM
3	12	24	18	4.5	4.19	EPDM	FKM
4	6	24 1/2	15	5.56	5.31	EPDM	FKM
4	12	25 1/16	18	5.56	5.31	EPDM	FKM
6	6	25 1/4	17	8.63	7.69	EPDM	FKM
6	12	26 7/16	20	8.63	7.69	EPDM	FKM
8	6	28-1/4	19	10.75	9.69	EPDM	FKM
8	12	27 5/8	22	10.75	9.69	EPDM	FKM
10	6	28 15/16	26	12.75	11.81	EPDM	FKM
10	12	31 3/4	23	12.75	11.81	EPDM	FKM
12	6	36 1/2	28	16	14.13	EPDM	FKM
12	12	40 7/8	31	16	14.13	EPDM	FKM
14	6	46	35	16	15.63	EPDM	FKM
14	12	52 3/4	38	16	15.63	EPDM	FKM



Proposal/Inquiry/Order No.

Customer Name:

Project Name:

Contractor:

PRINT CERTIFICATION:

Certified Correct As Of: _____

By: _____

compensators by Flexicraft combine excellent performance and economy. They can usually be provided quickly.

NOTES: